





Liberda Antriebstechnik

data sheet for electronic components


type: AG ST control unit PM2 BLDC master & slave

AG ST V4 premium BLDC master


AG ST V4 premium
BLDC slave

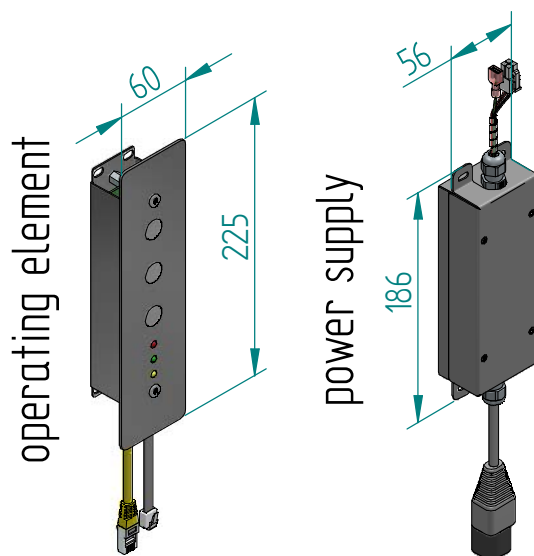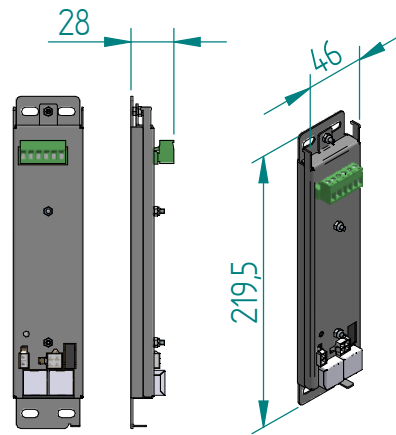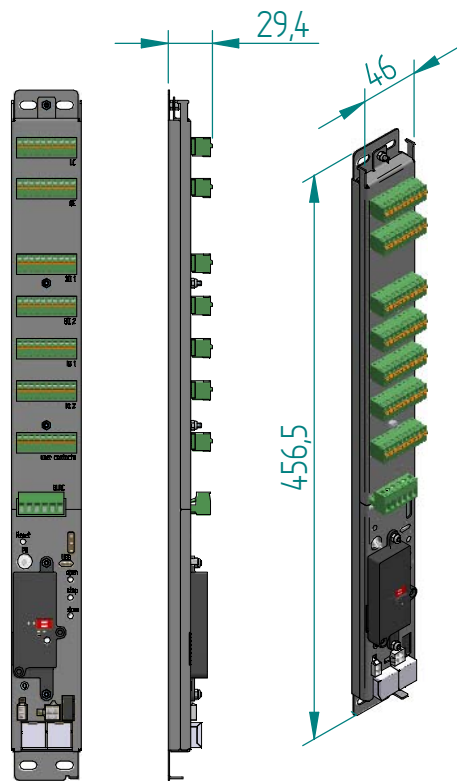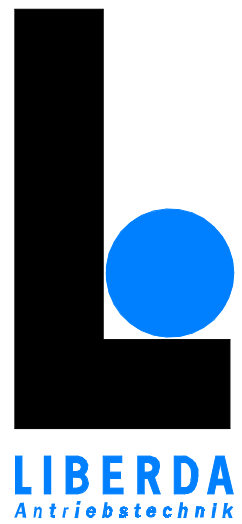

electrical diagram for control-unit with biMR:

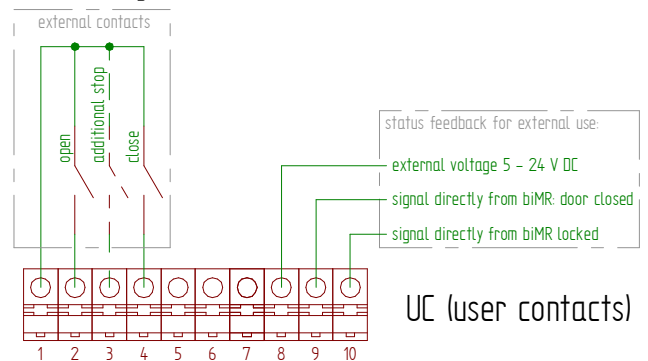

electrical diagram for control-unit with mechanical lock:

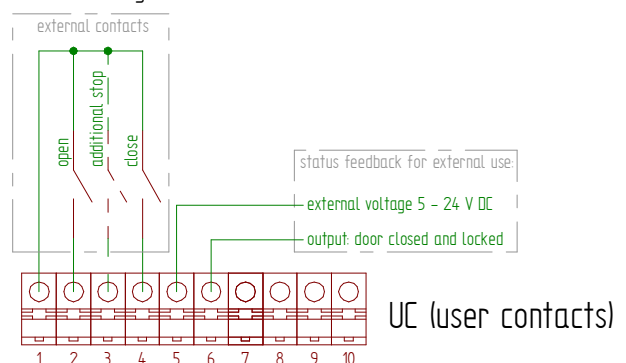

technical data:

operating voltage	24V DC
input	100-240V AC; 50-60Hz
max power	2016W
temperature	0°-60° C
IP-rating	IP20

Functions:

- WIFI included
- two button operation

The control has a sensitivity control.

Operation in hold-to-run mode or automatic mode, low energy drive according to EN 16005.

Liberda Antriebstechnik GmbH
A-1150 Wien
Geibelgasse 14-16
☎ +43 1 8953244
☎ +43 1 8953244 20
✉ antriebe@liberda.eu
www.liberda.eu
HG Wien FN113227k